



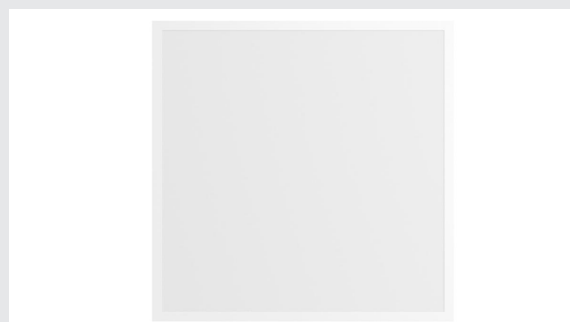

PANEL P

625 45 830 WB UGR19 ML DALI WH

The PANEL P product family stands for high energy savings, easy installation and long-lasting quality. Available in three sizes, the panels are ideal for offices, schools, health centres or retail spaces. With an efficiency of up to 200 lm/W, the lights make a significant contribution to reducing energy consumption. Thanks to UGR<19, they are ideal for screen-based workstations and provide glare-free light that is easy on the eyes. Available with ON/OFF or DALI control and in 3000K or 4000K light colours, they offer maximum design flexibility. Integrated through-wiring and external ballast allow quick, tool-free installation - ideal for time-critical projects.



TECHNICAL DATA

Item no.	1010112
IP Code	IP20
Impact resistance class	IK 02
Dimmable	Yes
Dimming technology	DALI
Primary nominal voltage	220-240V ~0/50/60 Hz
Secondary power / voltage	600-950 mA
Safety class	II
Wattage	26 W
Ambient temperature	80 °C
Minimum ambient temperature	-20 °C
Maximum ambient temperature	40 °C
Number of luminaires at LS B16A	29
Number of luminaires at LS C16A	48
Level of inrush current	14.75 A
Duration of inrush current	256 µs
Lumen	4514 / 6981 lm
Colour temperature	3000 Kelvin
Beam angle	110 °
Color	white
CRI	80
Binning	3 SDCM

Light Source

2385579	
---------	---

Accessories

1007576	PANEL 625 , recessed mounting frame
1007475	PANEL 625 , assembly mounting frame

Service life	100000 h
Risk Group	1
Length	62 cm
Width	62 cm
Height	3.6 cm
Net weight	1.95 kg
Gross weight	2.1 kg