



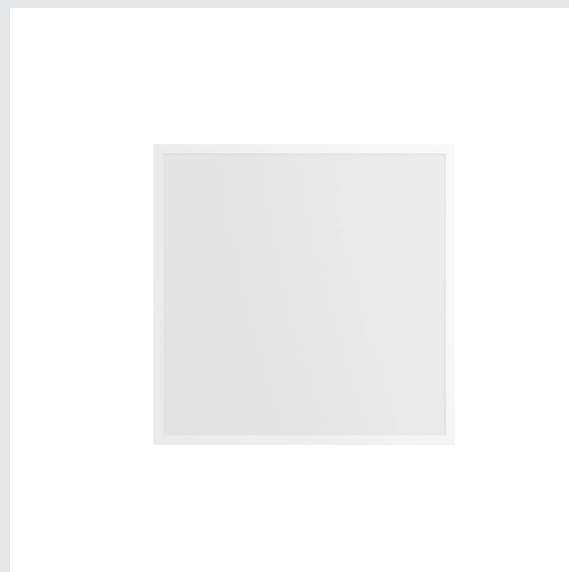

## PANEL P

595 45 830 WB UGR19

PANEL P is the ideal choice for refurbishments and new builds: 100,000 h service life, up to 200 lm/W, UGR<19, DALI options, emergency lighting capability and multi-lumen via DIP switch. Through-wiring included - for an efficient, future-proof lighting solution in the property sector.



## TECHNICAL DATA

|                                 |                      |
|---------------------------------|----------------------|
| Item no.                        | 1010748              |
| IP Code                         | IP20                 |
| Impact resistance class         | IK 02                |
| Primary nominal voltage         | 220-240V ~0/50/60 Hz |
| Secondary power / voltage       | 500-1000 mA          |
| Safety class                    | II                   |
| Wattage                         | 21 W                 |
| Ambient temperature             | 80 °C                |
| Minimum ambient temperature     | -20 °C               |
| Maximum ambient temperature     | 40 °C                |
| Number of luminaires at LS B16A | 27                   |
| Number of luminaires at LS C16A | 45                   |
| Level of inrush current         | 19.1 A               |
| Duration of inrush current      | 220 µs               |
| Lumen                           | 3937 / 7474 lm       |
| Colour temperature              | 3000 Kelvin          |
| Beam angle                      | 110 °                |
| Color                           | white                |
| CRI                             | 80                   |
| Binning                         | 3 SDCM               |
| Service life                    | 100000 h             |
| Risk Group                      | 1                    |

## Light Source

|         |                                                                                   |
|---------|-----------------------------------------------------------------------------------|
| 2385579 |  |
|---------|-----------------------------------------------------------------------------------|

## Accessories

|         |                                     |
|---------|-------------------------------------|
| 1007474 | PANEL 600 , assembly mounting frame |
| 1007575 | PANEL 600 , recessed mounting frame |

|              |         |
|--------------|---------|
| Length       | 59.5 cm |
| Width        | 59.5 cm |
| Height       | 3.6 cm  |
| Net weight   | 1.9 kg  |
| Gross weight | 2.1 kg  |